





LIFEPO₄ BATTERY PACKS(REPLACES LEAD ACID BATTERIES)


Model	Voltage(V)	Capacity(Ah)	Max.Discharging Current(A)	Max.Charging Current(A)	Size (L*W*H)	Weight
CT-6V6Ah	6.4	6	6	6	70*47*100mm	0.4kg
CT-12V6Ah	12.8	6	6	6	90*70*101mm	0.7kg
CT-12V9Ah	12.8	9	9	9	151*98*100mm	1.32kg
CT-12V12Ah	12.8	12	12	12	181*77*170mm	1.5kg
CT-12V18Ah	12.8	18	18	18	181*77*170mm	2.3kg
CT-12V24Ah	12.8	24	24	24	165*125*175mm	2.77kg
CT-12V30Ah	12.8	30	30	30	181*77*170mm	3.45kg
CT-12V40Ah	12.8	40	40	40	229*138*208mm	5.38kg
CT-12V50Ah	12.8	50	50	50	229*138*208mm	6kg
CT-12V54Ah	12.8	54	54	54	229*138*208mm	6.2kg
CT-12V100Ah	12.8	100	100	100	256*165*210mm	10.5kg
CT-12V150Ah	12.8	150	100	100	330*173*216mm	17.5kg
CT-12V200Ah	12.8	200	200	200	525*207*215mm	23kg
CT-12V230Ah	12.8	230	120	120	320*190*277mm	23kg
CT-12V280Ah	12.8	280	200	200	525*207*215mm	34kg
CT-12V314Ah	12.8	314	200	200	525*207*215mm	35kg
CT-24V12Ah	25.6	12	12	12	181*77*170mm	2.7kg
CT-24V15Ah	25.6	15	15	15	176*166*125mm	4.14kg
CT-24V18Ah	25.6	18	18	18	165*126*175mm	4.14kg
CT-24V30Ah	25.6	30	30	30	197*161*169mm	6.2kg
CT-24V50Ah	25.6	50	50	50	260*168*210mm	11.6kg
CT-24V100Ah	25.6	100	100	100	525*207*215mm	19.48kg
CT-24V150Ah	25.6	150	150	150	405*365*200mm	40kg
CT-24V280Ah	25.6	280	200	200	525*207*215mm	68kg
CT-24V314Ah	25.6	314	200	200	525*207*215mm	70kg



CTECHI
CREATIVE TECH INNOVATION



LIFEPO₄ BATTERY PACKS REPLACES LEAD ACID BATTERIES

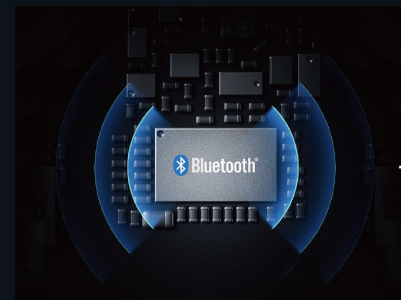

Bluetooth/LCD version
LiFePO₄ Battery



Low temperature
LiFePO₄ Battery



Connect in series
Connect in parallel

NORMAL TEMPERATURE CHARGING

Model	Nominal Voltage(V)	Typical Capacity(Ah)	Operating Temperature(°C)	25±2°C CA (A)	-18±2°C CCA (A)	Charge Current(A)	Size (mm)	Suitable for lead-acid battery models
CT-NA12V2Ah	12	2	0~75	95	70	1-6	115×70×86	YTX4L-BS,YTZ5S,YB4L-A,YB4L-B
CT-NA12V2Ah	12	2	0~75	95	70	1-6	115×70×110	YTX5L-BS,YTZ7S,YB7C-A
CT-NA12V2Ah	12	2	0~75	95	70	1-6	120×60×128	12N5-3B,12N5-4B,YB5L-B
CT-NA12V3.5Ah	12	3.5	0~75	110	85	1-10	115×70×110	YTX5L-BS,YTZ7S,YB7C-A
CT-NA12V3.5Ah	12	3.5	0~75	110	85	1-10	115×70×130	YTX7L-BS
CT-NA12V3.5Ah	12	3.5	0~75	110	85	1-10	150×85×95	YTX7A-BS
CT-NA12V4.5Ah	12	4.5	0~75	112.5	87	1-12	115×70×110	YTX5L-BS,YTZ7S,YB7C-A
CT-NA12V4.5Ah	12	4.5	0~75	112.5	87	1-12	115×70×130	YTX7L-BS
CT-NA12V4.5Ah	12	4.5	0~75	112.5	87	1-12	150×85×95	YTX7A-BS
CT-NA12V7Ah	12	7	0~75	220	170	2-21	150×85×105	YTX9-BS
CT-NA12V7Ah	12	7	0~75	220	170	2-21	150×85×130	YT12A-BS,YTZ12S,YTX12-BS,YTZ14S,YB12B-B2
CT-NA12V9Ah	12	9	0~75	230	174	2-27	150×85×105	YTX9-BS
CT-NA12V9Ah	12	9	0~75	230	174	2-27	150×85×130	YT12A-BS,YTZ12S,YTX12-BS,YTZ14S,YB12B-B2

LOW-TEMPERATURE CHARGING

Model	Nominal Voltage(V)	Typical Capacity(Ah)	Operating Temperature(°C)	25±2°C CA (A)	-18±2°C CCA (A)	Charge Current(A)	Size (mm)	Suitable for lead-acid battery models
CT-NA12V2Ah-LT	12	2	-20~75	100	75	1-6	115×70×86	YTX4L-BS,YTZ5S,YB4L-A,YB4L-B
CT-NA12V2Ah-LT	12	2	-20~75	100	75	1-6	115×70×110	YTX5L-BS,YTZ7S,YB7C-A
CT-NA12V3.5Ah-LT	12	3.5	-20~75	140	105	1-10	115×70×110	YTX5L-BS,YTZ7S,YB7C-A
CT-NA12V3.5Ah-LT	12	3.5	-20~75	140	105	1-10	115×70×130	YTX7L-BS
CT-NA12V3.5Ah-LT	12	3.5	-20~75	140	105	1-10	150×85×95	YTX7A-BS
CT-NA12V4.5Ah-LT	12	4.5	-20~75	180	140	1-12	115×70×110	YTX5L-BS,YTZ7S,YB7C-A
CT-NA12V4.5Ah-LT	12	4.5	-20~75	180	140	1-12	115×70×130	YTX7L-BS
CT-NA12V4.5Ah-LT	12	4.5	-20~75	180	140	1-12	150×85×95	YTX7A-BS
CT-NA12V7Ah-LT	12	7	-20~75	280	210	2-21	150×85×105	YTX9-BS
CT-NA12V7Ah-LT	12	7	-20~75	280	210	2-21	150×85×130	YT12A-BS,YTZ12S,YTX12-BS,YTZ14S,YB12B-B2
CT-NA12V9Ah-LT	12	9	-20~75	360	270	2-27	150×85×105	YTX9-BS
CT-NA12V9Ah-LT	12	9	-20~75	360	270	2-27	150×85×130	YT12A-BS,YTZ12S,YTX12-BS,YTZ14S,YB12B-B2



SODIUM-ION MOTORCYCLE STARTING BATTERY - Maintenance-free



Applicable Vehicle Range:

- 🔧 All motorcycle series: street bikes, sportbikes, cruisers, adventure/touring models
- 🔧 All-terrain vehicles: ATV / UTV and beach buggy series
- 🔧 Special vehicles: snowmobiles, sidecar motorcycles
- 🔥 General machinery: diesel / gasoline generator sets, tractors, harvesters, rice transplanters, etc.



WIDE TEMP RANGE
Reliable from -40°C to +60°C, excellent cold-start.



ZERO MAINTENANCE
No water refills or checks, fully maintenance-free.



HIGH SAFETY
Stable sodium material, no fire/explosion risk.



ECO & COST-EFFECTIVE
No Li/Co/Pb, low-cost abundant sodium.



LONG LIFE
≥3,000 CYCLES, 5-10 YEARS LIFESPAN,
2-3X LONGER THAN LEAD-ACID.



HIGH DISCHARGE
High-current pulse discharge,
instant start & heavy-load ready.

OEM&ODM IS WELCOME

24V SYSTEM

Model	Nominal voltage	Nominal capacity	Stored energy	Dimensions(mm)	Number of Module Methods	Standard Case Weight	Casing material	IP rating
B-LFP24-100MH	25.6V	100Ah	2.56kwh	Support Customized	1P*8S*1	42kg(88.18lbs.)	Steel	IP65
B-LFP24-135MH	25.6V	135Ah	3.46kwh	Support Customized	1P*8S*1	62kg(136.69lbs.)	Steel	IP65
B-LFP24-173MH	25.6V	173Ah	4.43kWh	Support Customized	1P*8S*1	73kg(160.94lbs.)	Steel	IP65
B-LFP24-205MH	25.6V	205Ah	5.25kWh	Support Customized	1P*4S*2	80kg(176.37lbs.)	Steel	IP65
B-LFP24-230MH	25.6V	230Ah	5.89kwh	Support Customized	1P*8S*1	85kg(187.39lbs.)	Steel	IP65
B-LFP24-280MH	25.6V	280Ah	7.17kWh	Support Customized	1P*8S*1	97kg(213.85lbs.)	Steel	IP65
B-LFP24-304MH	25.6V	304Ah	7.78kWh	Support Customized	1P*8S*1	102kg(224.87lbs.)	Steel	IP65
B-LFP24-346MH	25.6V	346Ah	8.86kwh	Support Customized	2P*4S*2	119kg(262.35lbs.)	Steel	IP65
B-LFP24-410MH	25.6V	410Ah	10.50kwh	Support Customized	2P*4S*2	142kg(313.06lbs.)	Steel	IP65
B-LFP24-460MH	25.6V	460Ah	11.78kwh	Support Customized	2P*4S*2	156kg(343.92lbs.)	Steel	IP65
B-LFP24-519MH	25.6V	519Ah	13.29kWh	Support Customized	3P*4S*2	171kg(376.99lbs.)	Steel	IP65
B-LFP24-560MH	25.6V	560Ah	14.34kWh	Support Customized	2P*4S*2	181kg(399.04lbs.)	Steel	IP65
B-LFP24-608MH	25.6V	608Ah	15.56kwh	Support Customized	2P*4S*2	190kg(418.88lbs.)	Steel	IP65
B-LFP24-615MH	25.6V	615Ah	15.74kWh	Support Customized	3P*4S*2	191kg(421.08lbs.)	Steel	IP65
B-LFP24-690MH	25.6V	690Ah	17.66kwh	Support Customized	3P*4S*2	210kg(462.97lbs.)	Steel	IP65
B-LFP24-840MH	25.6V	840Ah	20.99kwh	Support Customized	3P*2S*4	244kg(537.93lbs.)	Steel	IP65
B-LFP24-920MH	25.6V	920Ah	23.55kWh	Support Customized	4P*2S*4	270kg(595.25lbs.)	Steel	IP65
B-LFP24-1120MH	25.6V	1120Ah	28.67kwh	Support Customized	4P*2S*4	317kg(698.87lbs.)	Steel	IP65

36V SYSTEM

Model	Nominal voltage	Nominal capacity	Stored energy	Dimensions(mm)	Number of Module Methods	Standard Case Weight	Casing material	IP rating
B-LFP36-173MH	38.4V	173Ah	6.64kWh	Support Customized	1P*12S*1	108kg(238.10lbs.)	Steel	IP65
B-LFP36-205MH	38.4V	205Ah	7.87kWh	Support Customized	1P*12S*1	122kg(268.96lbs.)	Steel	IP65
B-LFP36-230MH	38.4V	230Ah	8.83kWh	Support Customized	1P*12S*1	129kg(284.40lbs.)	Steel	IP65
B-LFP36-280MH	38.4V	280Ah	10.752kWh	Support Customized	1P*6S*2	148kg(326.28lbs.)	Steel	IP65
B-LFP36-304MH	38.4V	304Ah	11.67kWh	Support Customized	1P*6S*2	155kg(341.72lbs.)	Steel	IP65
B-LFP36-346MH	38.4V	346Ah	13.29kWh	Support Customized	2P*4S*2	171kg(376.99lbs.)	Steel	IP65
B-LFP36-410MH	38.4V	410Ah	15.744kWh	Support Customized	2P*4S*3	204kg(449.74lbs.)	Steel	IP65
B-LFP36-460MH	38.4V	460Ah	17.664kWh	Support Customized	2P*4S*3	219kg(482.81lbs.)	Steel	IP65
B-LFP36-519MH	38.4V	519Ah	19.93kWh	Support Customized	3P*4S*3	249kg(548.95lbs.)	Steel	IP65
B-LFP36-560MH	38.4V	560Ah	21.504kWh	Support Customized	2P*4S*3	261kg(575.41lbs.)	Steel	IP65
B-LFP36-615MH	38.4V	615Ah	23.616kWh	Support Customized	3P*4S*3	281kg(619.50lbs.)	Steel	IP65
B-LFP36-690MH	38.4V	690Ah	26.496kWh	Support Customized	3P*4S*3	301kg(663.59lbs.)	Steel	IP65
B-LFP36-820MH	38.4V	820Ah	31.488kWh	Support Customized	2P*4S*6	344kg(758.39lbs.)	Steel	IP65
B-LFP36-920MH	38.4V	920Ah	35.328kWh	Support Customized	4P*2S*6	403kg(888.46lbs.)	Steel	IP65
B-LFP36-1120MH	38.4V	1120Ah	43.01kWh	Support Customized	4P*2S*6	481kg(1060.42lbs.)	Steel	IP65

Motive Power Batteries

24V / 36V / 48V / 72V / 80V




OEM&ODM IS WELCOME

48V SYSTEM

Model	Nominal voltage	Nominal capacity	Stored energy	Dimensions(mm)	Number of Module Methods	Standard Case Weight	Casing material	IP rating
B-LFP48-173MH	51.2V	173Ah	8.86kWh	Support Customized	1P*8S*2	125kg(275.58lbs.)	Steel	IP65
B-LFP48-205MH	51.2V	205Ah	10.50kWh	Support Customized	1P*8S*2	145kg(319.67lbs.)	Steel	IP65
B-LFP48-230MH	51.2V	230Ah	11.78kWh	Support Customized	1P*8S*2	154kg(339.51lbs.)	Steel	IP65
B-LFP48-280MH	51.2V	280Ah	14.336kWh	Support Customized	1P*8S*2	179kg(394.63lbs.)	Steel	IP65
B-LFP48-304MH	51.2V	304Ah	15.565kWh	Support Customized	1P*8S*2	190kg(418.88lbs.)	Steel	IP65
B-LFP48-346MH	51.2V	346Ah	17.72kWh	815*540*400	2P*4S*4	361kg(795.87lbs.)	Steel	IP65
B-LFP48-410MH	51.2V	410Ah	20.992kWh	815*540*400	2P*4S*4	366kg(806.89lbs.)	Steel	IP65
B-LFP48-460MH	51.2V	460Ah	23.552kWh	815*540*400	2P*4S*4	372kg(820.12lbs.)	Steel	IP65
B-LFP48-519MH	51.2V	519Ah	26.57kWh	Support Customized	3P*4S*4	306kg(674.61lbs.)	Steel	IP65
B-LFP48-560MH-A	51.2V	560Ah	28.672kWh	815*668*400	2P*4S*4	477kg(1051.60lbs.)	Steel	IP65
B-LFP48-608MH-A	51.2V	608Ah	31.13kWh	815*668*400	2P*4S*4	487kg(1073.65lbs.)	Steel	IP65
B-LFP48-560MH-B	51.2V	560Ah	28.672kWh	748*612*595	2P*4S*4	383kg(844.37lbs.)	Steel	IP65
B-LFP48-608MH-B	51.2V	608Ah	31.13kWh	748*612*595	2P*4S*4	393kg(866.42lbs.)	Steel	IP65
B-LFP48-615MH	51.2V	615Ah	31.488kWh	815*770*400	3P*4S*4	537kg(1183.88lbs.)	Steel	IP65
B-LFP48-690MH	51.2V	690Ah	35.328kWh	815*770*400	3P*4S*4	547kg(1205.93lbs.)	Steel	IP65
B-LFP48-820MH	51.2V	820Ah	41.984kWh	Support Customized	4P*4S*4	468kg(1031.76lbs.)	Steel	IP65
B-LFP48-920MH	51.2V	920Ah	47.104kWh	Support Customized	4P*2S*8	527kg(1161.84lbs.)	Steel	IP65
B-LFP48-1120MH	51.2V	1120Ah	57.344kWh	Support Customized	4P*2S*8	629kg(1386.71lbs.)	Steel	IP65

72V SYSTEM

Model	Nominal voltage	Nominal capacity	Stored energy	Dimensions(mm)	Number of Module Methods	Standard Case Weight	Casing material	IP rating
B-LFP72-346MH	76.8V	346Ah	26.572kWh	Support Customized	2P*4S*6	351kg(773.82lbs.)	Steel	IP65
B-LFP72-410MH	76.8V	410Ah	31.488kWh	Support Customized	3P*4S*6	417kg(919.33lbs.)	Steel	IP65
B-LFP72-460MH	76.8V	460Ah	35.328kWh	Support Customized	3P*4S*6	448kg(987.67lbs.)	Steel	IP65
B-LFP72-519MH	76.8V	519Ah	39.86kWh	Support Customized	3P*4S*6	487kg(1073.65lbs.)	Steel	IP65
B-LFP72-560MH	76.8V	560Ah	43.008kWh	Support Customized	2P*4S*6	516kg(1137.59lbs.)	Steel	IP65
B-LFP72-615MH	76.8V	615Ah	47.23kWh	Support Customized	3P*4S*6	558kg(1230.18lbs.)	Steel	IP65
B-LFP72-690MH	76.8V	690Ah	52.99kWh	Support Customized	3P*4S*6	639kg(1408.76lbs.)	Steel	IP65

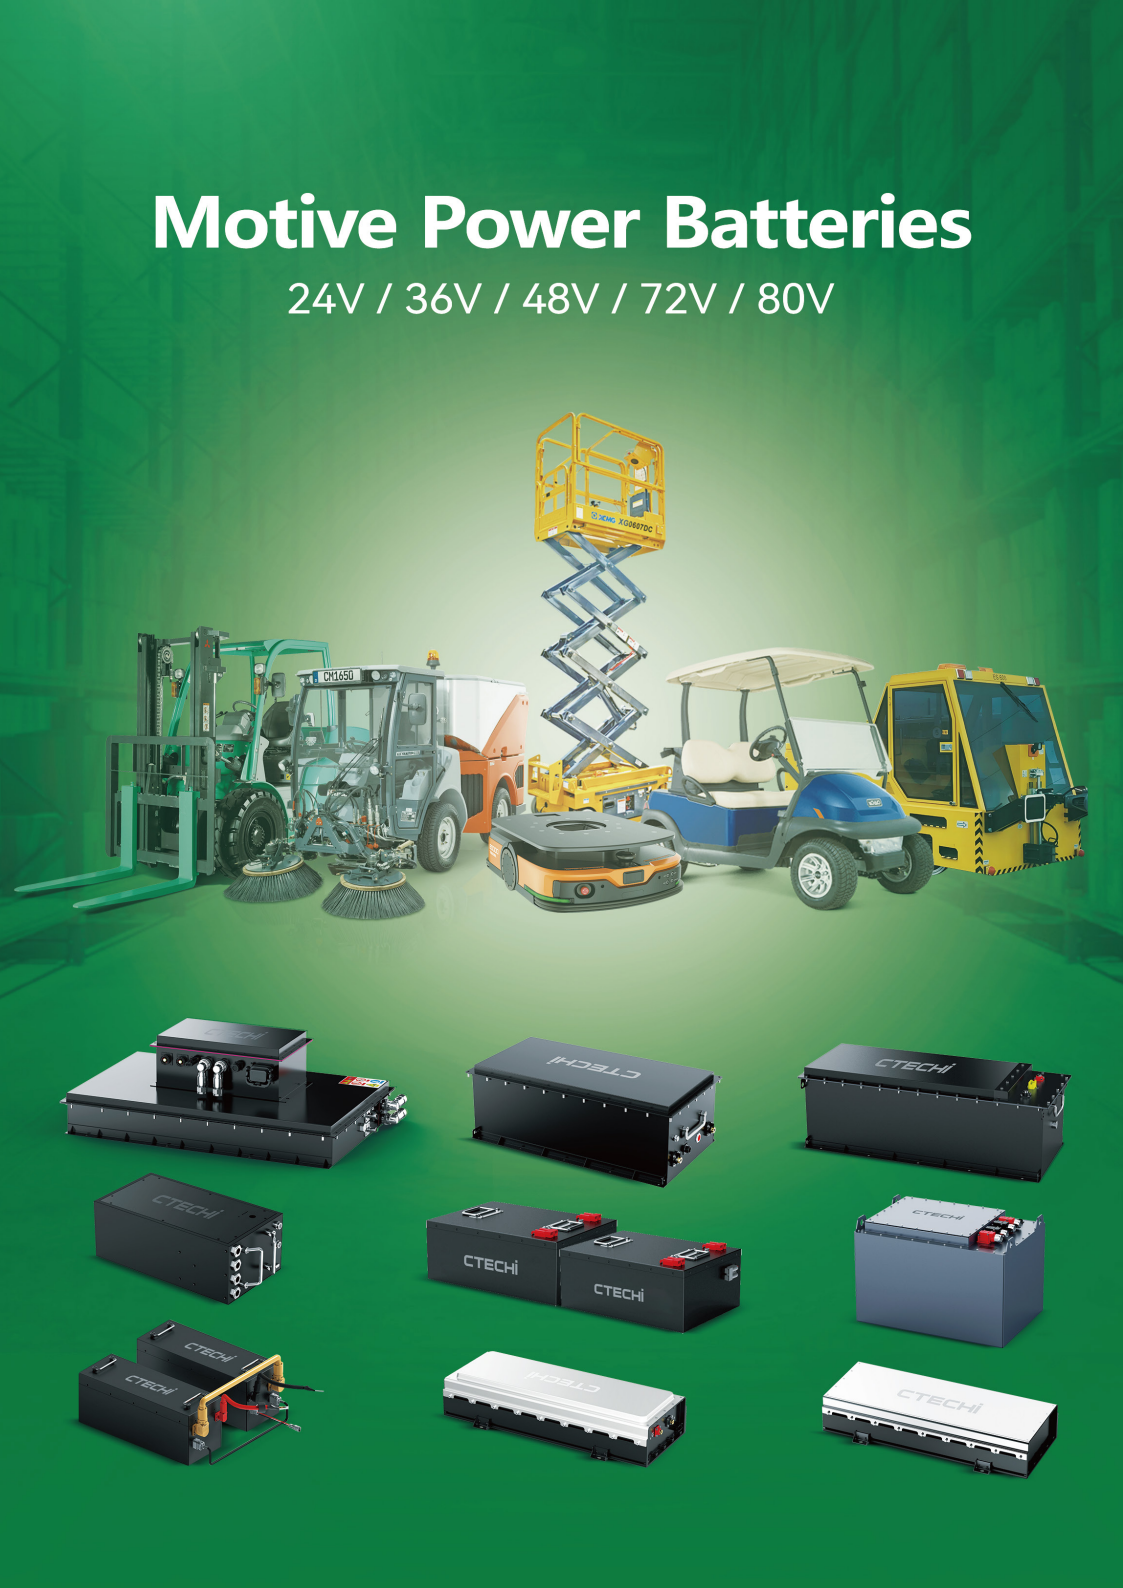

OEM&ODM IS WELCOME

80V SYSTEM

Model	Nominal voltage	Nominal capacity	Stored energy	Dimensions(mm)	Number of Module	Methods	Standard Case Weight	Casing material	IP rating
B-LFP80-205MH	83.2V	205Ah	17.06kWh	Support Customized	1P*8S*2+1P*10S*1		204kg(449.74lbs.)	Steel	IP65
B-LFP80-230MH	83.2V	230Ah	19.14kWh	Support Customized	1P*8S*2+1P*10S*1		220kg(485.02lbs.)	Steel	IP65
B-LFP80-280MH	83.2V	280Ah	23.29kWh	Support Customized	1P*4S*6+1P*2S*1		284kg(626.11lbs.)	Steel	IP65
B-LFP80-304MH	83.2V	304Ah	25.29kWh	Support Customized	1P*4S*6+1P*2S*1		322kg(709.89lbs.)	Steel	IP65
B-LFP80-346MH	80V	346Ah	27.68kWh	1015*630*400	2P*5S*5		516kg(1137.59lbs.)	Steel	IP65
B-LFP80-410MH	80V	410Ah	32.8kWh	1015*630*400	3P*4S*6+3P*2S*1		528kg(1164.04lbs.)	Steel	IP65
B-LFP80-460MH	80V	460Ah	36.8kWh	1015*630*400	2P*4S*6+3P*2S*1		538kg(1186.09lbs.)	Steel	IP65
B-LFP80-519MH	80V	519Ah	41.52kWh	Support Customized	3P*5S*5		512kg(1128.77lbs.)	Steel	IP65
B-LFP80-560MH	80V	560Ah	44.8kWh	1015*810*400	2P*4S*6+2P*2S*1		650kg(1433.00lbs.)	Steel	IP65
B-LFP80-608MH	80V	608Ah	48.64kWh	1015*810*400			660kg(1455.05lbs.)	Steel	IP65
B-LFP80-615MH	83.2V	615Ah	51.168kWh	780*750*570	2P*4S*6+2P*2S*1		668kg(1472.69lbs.)	Steel	IP65
B-LFP80-690MH	83.2V	519Ah	57.408kWh	780*750*570	3P*2S*13		684kg(1507.96lbs.)	Steel	IP65
B-LFP80-820MH	83.2V	820Ah	68.224kWh	Support Customized	3P*4S*6+3P*2S*1		817kg(1801.18lbs.)	Steel	IP65
B-LFP80-920MH	83.2V	920Ah	76.544kWh	Support Customized	3P*2S*13		948kg(2089.98lbs.)	Steel	IP65
B-LFP80-1120MH	83.2V	1120Ah	93.184kWh	Support Customized	4P*2S*13		1136kg(2504.45lbs.)	Steel	IP65
B-LFP80-1400MH	83.2V	1380Ah	114.82kWh	Support Customized	4P*2S*13		1370kg(3020.33lbs.)	Steel	IP65

Motive Power Batteries

24V / 36V / 48V / 72V / 80V



CCTV Security Battery



Application :	Smoke Detector Fire Alarm
Model :	CT-123A
Nominal Voltage (V) :	3
Nominal Capacity (mAh) :	1400



Application :	Fire emergency lights
Model :	CT-1213A
Nominal Voltage (V) :	11.1
Nominal Capacity (mAh) :	5200



Application :	Infrared camera
Model :	CT-125A
Nominal Voltage (V) :	3.7
Nominal Capacity (mAh) :	4000/4400/5000/5200/6000/6400



Application :	CCTV Camera
Model :	CT-124A
Nominal Voltage (V) :	11.1
Nominal Capacity (mAh) :	5000/9000/12500



Application :	Rainproof and lightning-proof camera
Model :	CT-126A
Nominal Voltage (V) :	12
Nominal Capacity (mAh) :	800/2200/3600/4400/6600



Application :	Video doorbell
Model :	CT-1210A
Nominal Voltage (V) :	10.8
Nominal Capacity (mAh) :	12750



Application :	Wireless Camera
Model :	CT-128A
Nominal Voltage (V) :	12.6
Nominal Capacity (mAh) :	1800/3000/4000/4800



Application :	Mobile Camera
Model :	CT-129A
Nominal Voltage (V) :	7.2
Nominal Capacity (mAh) :	13.4Ah



Application :	Smart door lock
Model :	CT-1211A
Nominal Voltage (V) :	7.4
Nominal Capacity (mAh) :	4200/5000



Application :	Monitoring, router backup power supply
Model :	CT-1214A
Nominal Voltage (V) :	10.8
Nominal Capacity (mAh) :	2000/2600/3000



Application :	Electric fence
Model :	CT-1212A
Nominal Voltage (V) :	12
Nominal Capacity (mAh) :	7000/18000



Application :	CCTV Tester
Model :	CT-1216A
Nominal Voltage (V) :	7.4
Nominal Capacity (mAh) :	6500



Application :	Metal Detector Door
Model :	CT-1215A
Nominal Voltage (V) :	12
Nominal Capacity (mAh) :	7000



Application :	Solar power monitoring system security
Model :	CT-127A
Nominal Voltage (V) :	12
Nominal Capacity (mAh) :	20Ah-120Ah



OEM&ODM IS WELCOME

Drone Battery Pack

Model	Nominal Voltage (V)	Nominal Capacity (Ah)	Nominal Rate (C)	Dimension (mm)	Weight (kg)
CT11.1V4Ah-150C	11.1	4	150	136.8*44.8*25.9	0.3
CT11.1V5Ah-150C	11.1	5	150	136.8*44.8*31.3	0.39
CT11.1V6Ah-150C	11.1	6	150	155.8*49.8*28.3	0.456
CT11.1V8Ah-150C	11.1	8	150	166.8*60.8*28.3	0.585
CT11.1V9Ah-150C	11.1	9	150	140.8*71.8*32.8	0.72
CT11.1V10Ah-150C	11.1	10	150	166.8*60.8*31.3	0.66
CT14.8V4Ah-150C	14.8	4	150	136.8*44.8*34.2	0.4
CT14.8V5Ah-150C	14.8	5	150	136.8*44.8*41.4	0.52
CT14.8V6Ah-150C	14.8	6	150	155.8*49.8*37.4	0.608
CT14.8V8Ah-150C	14.8	8	150	166.8*60.8*37.4	0.78
CT14.8V9Ah-150C	14.8	9	150	140.8*71.8*43.4	0.96
CT14.8V10Ah-150C	14.8	10	150	166.8*60.8*41.4	0.88
CT24V16Ah-5C	22.2-24	16	5	73*62*205	1.59
CT23.1V25Ah-8C	22.2-24	25	8	66*93*215	2.55
CT22.2V22Ah-15C	22.2-24	22	15	69*99*210	2.7
CT22.2V27Ah-15C	22.2-24	27	15	69*101*230	3.2
CT22.2V30Ah-15C	22.2-24	30	15	65*129*222	3.75
CT22.2V8.3Ah-25C	22.2-24	8.3	25	39*69*208	1.1
CT22.2V10Ah-25C	22.2-24	10	25	53*68*208	1.45
CT22.2V12Ah-25C	22.2-24	12	25	64*74*190	1.7
CT22.2V16Ah-25C	22.2-24	16	25	73*78*190	2.1
CT22.8V30Ah-30C	22.2-24	30	30	68*109*250	3.35
CT22.2V4Ah-150C	22.2-24	4	150	136.8*44.8*50.8	0.6
CT22.2V5Ah-150C	22.2-24	5	150	136.8*44.8*61.6	0.77
CT22.2V6Ah-150C	22.2-24	6	150	155.8*49.8*55.6	0.902
CT22.2V8Ah-150C	22.2-24	8	150	166.8*60.8*55.6	1.16
CT22.2V9Ah-150C	22.2-24	9	150	140.8*71.8*64.6	1.43
CT22.2V10Ah-150C	22.2-24	10	150	166.8*60.8*61.6	1.31
CT48V16Ah-5C	44.4-48	16	6	143*62*205	3.15
CT46.2V25Ah-8C	44.4-48	25	8	129*93*215	4.98
CT44.4V16Ah-15C	44.4-48	16	15	144*78*190	4
CT44.4V22Ah-15C	44.4-48	22	15	135*99*210	5.3
CT44.4V27Ah-15C	44.4-48	27	15	135*101*230	6.2
CT44.4V30Ah-15C	44.4-48	30	15	128*129*222	7.4
CT44.4V8.3Ah-25C	44.4-48	8.3	25	78*69*208	2.1
CT44.4V10Ah-25C	44.4-48	10	25	103*68*208	2.7
CT44.4V12Ah-25C	44.4-48	12	25	125*74*190	3.3
CT45.6V30Ah-30C	44.4-48	30	30	132*109*250	6.58
CT53.9V25Ah-8C	51.8-56	25	8	150*93*215	5.77
CT51.8V22Ah-15C	51.8-56	22	15	156*100*210	6.1
CT51.8V27Ah-15C	51.8-56	27	15	156*101*230	7.2
CT51.8V30Ah-15C	51.8-56	30	15	150*129*222	8.6
CT53.2V30Ah-30C	51.8-56	30	30	154*109*250	7.7



OEM&ODM IS WELCOME